



RELIABILITY Power Systems

REL2700G4 RT 6 ~ 10KVA

True Online Dual Conversion UPS System

REL2700G4 RT

6 kVA ~ 10 kVA

PF 1.0



Features

- Advanced DSP and 3-level technology
- Output power factor 1.0
- Active power factor correction (APFC), input power factor up to 0.99
- High efficiency 95% (up to 98% in ECO mode)
- Advanced digital parallel technology
- Wide input voltage range (110 ~ 288 Vac) and frequency range (40 ~ 70 Hz)
- 50 / 60 Hz frequency auto sensing
- Two modes of frequency conversion: 50 Hz input / 60 Hz output or 60 Hz input / 50 Hz output
- Hot-swappable battery
- Flexible battery configuration (settable 16 - 20 pcs batteries)
- Digitally controlled charger
- High charging current available (Max. 12 A)
- Charging voltage and current configured by demands
- Linear derating in low voltage input reducing battery discharging times, extending the service life of battery
- Intelligent battery management, automatic floating / equalizing charge control, charger dormancy control, increasing battery life by 50%

- Ability to switch on the UPS with batteries
- Settable delayed start time when mains power is restored, reducing the impact on power grid or generator
- Fan speed varies intelligently with temperature, reducing noise and extending its service life
- Equipped with self-aging function
- Compact internal layout, miniaturized the complete unit for small footprint
- LCD+LED display, multi-functional keys operation, friendly human-machine interface
- Powerful background software for parameters configuration
- Advanced multi-platform communications: RS232, USB, RS485, SNMP and dry contacts communication interfaces
- Effective software and hardware protection function: robust self-diagnostic function, robust abundant event log for check

Available Options

- RS232 and smart card slot included
- Optional parallel function, battery temperature compensation, SNMP card, USB, RS485 card, dry contacts, EMD, and SMS alarms

Rear Panel


1. SNMP (optional)
2. Fans
3. Parallel (optional)
4. RS232
5. EPO
6. USB (optional)
7. Temperature Compensation (optional)
8. GND
9. Bypass Breaker
10. Terminal and Cover
11. Battery Pack




Display panel can be rotated



6/10KVA(H)

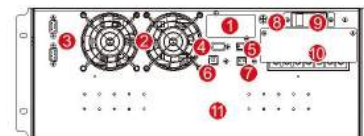

6/10KVA(S)

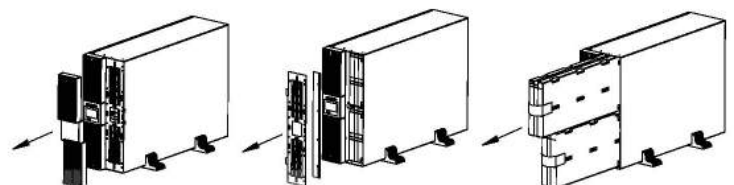

Easy for maintenance, hot-swappable battery

Specifications

MODEL	REL2700G4 RT	
Capacity	6 kVA / 6 kW	10 kVA / 10 kW
INPUT		
Input wiring	Single-phase three-wire (1 Φ + N + PE)	
Rated voltage	208 / 220 / 230 / 240 Vac	
Voltage range	110 ~ 176 Vac (linear derating between 50% and 100% load); 176 ~ 288 Vac (no derating)	
Rated frequency	50 / 60 Hz (auto-sensing)	
Frequency range	40 ~ 70 Hz	
Power factor	≥ 0.99	
Bypass voltage range	- 40% ~ +15% (settable)	
Total harmonic distortion (THDi)	$\leq 5\%$	
OUTPUT		
Output wiring	Single-phase (L-N)	
Rated voltage	208 (PF=0.9) / 220 / 230 / 240 Vac	
Voltage regulation	$\pm 1\%$	
Frequency	Synchronized to bypass in mains mode; 50 / 60 Hz $\pm 0.1\%$ Hz in battery mode	
Waveform	Sinusoidal	
Power factor	1	
Total harmonic distortion (THDv)	$\leq 1\%$ (linear load); $\leq 4\%$ (non-linear load)	
Crest factor	3:1	
Overload	105% ~ 110% for 10 min, 110% ~ 125% for 1 min, 126% ~ 150% for 30 s	
BATTERIES		
DC voltage	192 Vdc (192~240 Vdc settable)	
Number of battery	16 pcs (16 ~ 20 settable)	
Inbuilt battery (standard model)	12 V / 7 Ah \times 16	12 V / 9 Ah \times 16
Charging current	Standard model: 1 A; Long time model: 5 A (default), 1 ~ 5 A settable, 12 A (optional)	
Recharge time	Standard model: 90% capacity restored in 8 hours; Long time model: depend on the capacity of battery	
SYSTEM		
Efficiency	$\geq 94\%$ at 100% load, max. 94.5% at 60% load, $\geq 98\%$ in ECO mode	
Transfer time	0 ms	
Protections	Short-circuit, overload, overtemperature, battery low voltage, overvoltage, undervoltage and fan failure	
Max. number of parallel connections	4	
Communications	RS232 (standard), USB / RS485 / dry contacts / SNMP / battery temperature compensation (optional)	
Display	LCD + LED	
OTHERS		
Operating temperature	0 $^{\circ}$ C ~ 40 $^{\circ}$ C	
Storage temperature	-25 $^{\circ}$ C ~ 55 $^{\circ}$ C (without battery)	
Relative humidity	0 ~ 95% (non-condensing)	
Altitude	≤ 1000 m, derating 1% for each additional 100 m	
IP rating	IP 20	
Noise level at 1 m	≤ 55 dB	≤ 58 dB
Dimensions (W \times D \times H) (mm)	440 \times 660 \times 176 (S) 440 \times 580 \times 88 (H)	
Packaged dimensions (W \times D \times H) (mm)	554 \times 792 \times 418 (S) 514 \times 696 \times 168 (H)	
Net weight (kg)	58 (S), 12 (H)	63 (S), 14 (H)
Gross weight (kg)	68 (S), 14 (H)	73 (S), 16 (H)

- S means standard model; H means long time model.
- All specifications are subject to change without notice.

Reliability Power Systems Australia

Level 17, 40 Mount St. North Sydney
NSW 2060, Australia
reliability@reliability-power.com

Reliability Power Systems

Reliability Power Systems Canada

4th Floor 2 County Blvd, Brampton
ON L6W 3W8, Canada
reliability.ca@reliability-power.com

Reliability Power Systems Europe

New Summer St, Birmingham
West Midlands B19, UK
reliability.eu@reliability-power.com

Reliability Power Systems Asia Pacific

5/F China Life Tower, No.16 Chaowai St.
Chaoyang Dist, Beijing 100020, China
reliability.cn@reliability-power.com